


TRL Series

Core Mounting - Low Profile

Low Profile Transformers



Features:

- Height saving low profile construction (500VA = 3" high).
- In-chassis or on-chassis mounting.
- If more than two diagonal mounting screws are used, insulating washers are recommended under the heads.
- Dual Primaries 115/230V, 50/60Hz.
- Colour coded flexible wire leads.
- Dielectric tested to UL/CSA standards.
- CSA certified LR16597. UL recognized E105782.

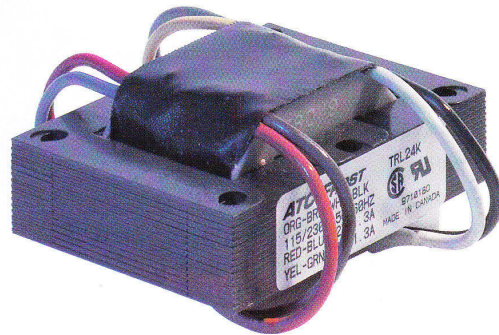

115/230 Volt 50/60Hz Primary

Cat. No.	Size	Secondary	
		Series	Parallel
TRL 12K	15	12.6VCT @ 1.2A	6.3V @ 2.4A
TRL 12L	30	12.6VCT @ 2.4A	6.3V @ 4.8A
TRL 16J	15	16VCT @ .94A	8V @ 1.9A
TRL 16L	30	16VCT @ 1.9A	8V @ 3.8A
TRL 16M	50	16VCT @ 3.2A	8V @ 6.4A
TRL 20H	15	20VCT @ .75A	10V @ 1.5A
TRL 20K	30	20VCT @ 1.5A	10V @ 3.0A
TRL 20M	50	20VCT @ 2.5A	10V @ 5.0A
TRL 20N	90	20VCT @ 4.5A	10V @ 9.0A
TRL 24K	30	24VCT @ 1.3A	12V @ 2.6A
TRL 24L	50	24VCT @ 2.1A	12V @ 4.2A
TRL 24N	90	24VCT @ 3.8A	12V @ 7.6A
TRL 24P	120	24VCT @ 5.0A	12V @ 10A
TRL 30G	15	30VCT @ .50A	15V @ 1.0A
TRL 30J	30	30VCT @ 1.0A	15V @ 2.0A
TRL 30K	50	30VCT @ 1.7A	15V @ 3.4A
TRL 30M	90	30VCT @ 3.0A	15V @ 6.0A
TRL 30N	120	30VCT @ 4.0A	15V @ 8.0A
TRL 40H	30	40VCT @ .75A	20V @ 1.5A
TRL 40K	50	40VCT @ 1.3A	20V @ 2.6A
TRL 40L	90	40VCT @ 2.3A	20V @ 4.6A
TRL 40M	120	40VCT @ 3.0A	20V @ 6.0A
TRL 40N	160	40VCT @ 4.0A	20V @ 8.0A
TRL 40Q	225	40VCT @ 5.6A	20V @ 11A
TRL 50J	50	50VCT @ 1.0A	25V @ 2.0A
TRL 50K	90	50VCT @ 1.8A	25V @ 3.6A
TRL 50L	120	50VCT @ 2.4A	25V @ 4.8A
TRL 50M	160	50VCT @ 3.2A	25V @ 6.4A
TRL 50P	225	50VCT @ 4.5A	25V @ 9.0A
TRL 50Q	300	50VCT @ 6.0A	25V @ 12A
TRL 56R	500	56VCT @ 9.0A	28V @ 18A
TRL 70J	90	70VCT @ 1.3A	25V @ 2.6A
TRL 70K	120	70VCT @ 1.7A	25V @ 3.4A
TRL 70L	160	70VCT @ 2.3A	25V @ 4.6A
TRL 70M	225	70VCT @ 3.2A	25V @ 6.4A
TRL 70N	300	70VCT @ 4.3A	25V @ 8.6A
TRL 70Q	500	70VCT @ 7.2A	25V @ 14A
TRL 90M	300	90VCT @ 3.3A	45V @ 6.6A
TRL 90P	500	90VCT @ 5.6A	45V @ 11A
TRL 110N	500	110VCT @ 4.6A	55V @ 9.1A
TRL 240F	90	240VCT @ .38A	120V @ .76A
TRL 240G	120	240VCT @ .50A	120V @ 1.0A
TRL 240H	160	240VCT @ .67A	120V @ 1.3A
TRL 240J	225	240VCT @ .94A	120V @ 1.9A

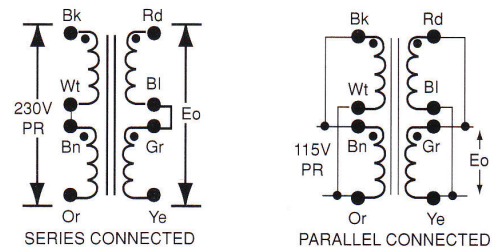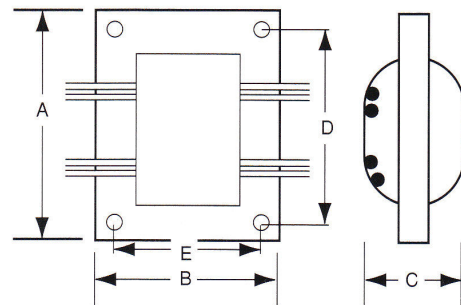

Approx. Dimensions (inches)					
Size	A	B	C	D	E
15	3.00	2.50	1.2	2.50	2.00
30	3.00	2.50	1.5	2.50	2.00
50	3.75	3.13	1.6	3.13	2.50
90	4.50	3.75	1.8	3.75	3.00
120	4.50	3.75	2.3	3.75	3.00
160	5.25	4.38	2.2	4.38	3.50
225	5.25	4.38	2.6	5.31	4.25
300	6.38	5.31	2.6	5.31	4.25
500	6.75	5.63	3.0	6.13	5.00