


TLB-TLE-FPT Series

Open - Enclosed - Toroid

Low Voltage Lighting Transformers

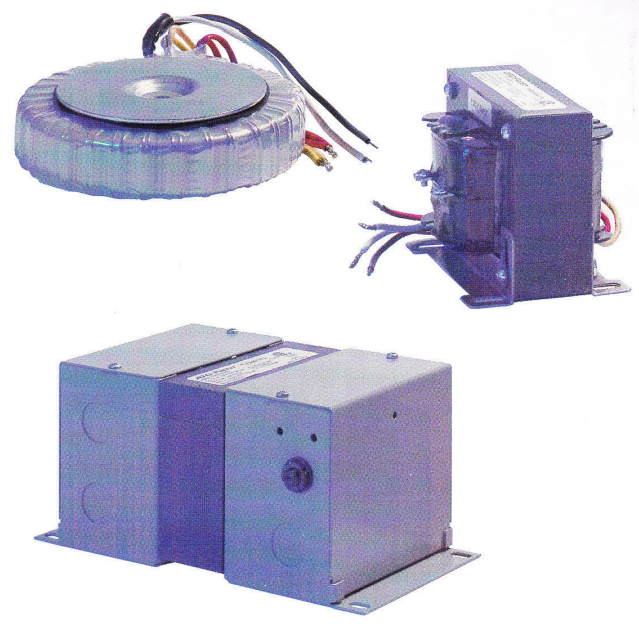

Application:


These low voltage, general purpose transformers have additional features of secondary protection and double insulation and are suitable for use with low voltage lighting circuits.

Features:

- All models employ double insulation construction.
- Dielectric strength tested to CSA/UL standards.
- Enclosed models come complete with secondary breaker protection.
- Open and Toroid models specify what secondary protection is required.
- Suitable electrical enclosures must be provided on Open and Toroid models.
- Toroids are supplied with mounting hardware.
- Custom sizes, ratings and terminations can be engineered to suit your application.
- Some models are also CSA certified to TIL-B45 as suitable for use with "Trapeze Lighting Systems".
- See agency approval listing for each transformer type.
- Class B-130°C Insulation system used on all designs.

120 Volt 60Hz Primary


TLB Open



Cat. No.	VA Watts	Secondary Volts	Protector Required	Component Recognized			A	B	C	D	E
				UL	CSA	TIL-B45					
TLB15012-ITL	150	12	15A	X	X	X	3.75	3.00	3.13	3.13	2.50
TLB24012-ITL	240	12	20A	X	X	X	4.50	4.25	3.75	3.75	2.75
TLB24024-ITL	240	24	10A	X	X	X	4.50	4.25	3.75	3.75	2.75
TLB30012-ITL	300	12	25A	X	X		4.50	4.25	3.75	3.75	2.75
TLB48024CT-ITL	480	24CT	2 x 20A	X	X	X	4.50	6.00	3.75	3.75	4.50
TLB60024CT-ITL	600	24CT	2 x 25A	X	X		5.25	5.00	4.38	4.38	3.75

120 Volt 60Hz Primary

TLE Enclosed




Cat. No.	VA Watts	Secondary Volts	Protector Provided*	Approval Listing		A	B	C	D	E
				CSA (NRTL/C)	TIL-B45					
TLE15012-ITL	150	12	15A	X	X	3.88	8.75	3.50	3.20	8.00
TLE24012-ITL	240	12	20A	X	X	4.50	9.00	4.00	3.75	8.25
TLE24024-ITL	240	24	10A	X	X	4.50	9.00	4.00	3.75	8.25
TLE30012-ITL	300	12	25A	X		4.50	9.00	4.00	3.75	8.25
TLE48024CT-ITT	480	24CT	2 x 20A	X	X	4.50	10.75	4.00	3.75	10.0
TLE60024CT-ITT	600	24CT	2 x 25A	X		4.50	10.75	5.25	3.50	9.75

* Trip free, push to reset thermal breaker

120 Volt 60Hz Primary

FPT Toroid



Cat. No.	VA Watts	Secondary Volts	Protector Required	Component Recognized			OD	HT*
				UL	CSA	TIL-B45		
FPT150	150	12/24	15A or 7A	X	X	X	4.50	2.00
FPT240	240	12/24	20A or 10A	X	X	X	4.70	2.40
FPT240A	240	12/24	20A or 10A	X	X	X	6.25	1.63
FPT300	300	12/24	25A or 15A	X	X		4.50	2.60
FPT480	480	24CT	2 x 20A	X	X	X	5.40	2.75
FPT600	600	24CT	2 x 25A	X	X		6.00	3.00

* HT includes mounting hardware