





**Dimensions mm[inch]**  
 tolerances acc. to DIN ISO 2768-m  
 Toleranzen gem. DIN ISO 2768-m

**Isometric**  
 Scale 1:1  
 Maßstab 1:1




**Schematic**




**Marking**  
 according to EN60062/factory code  
 gem. EN60062/Fertigungsstätte



**Housing**

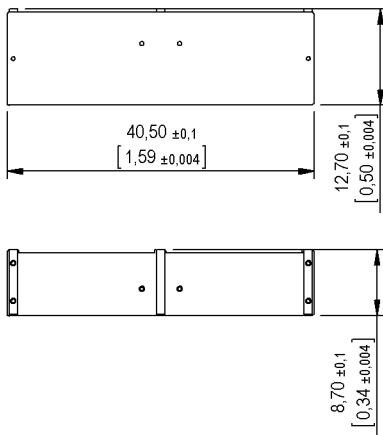

**Switching distances**

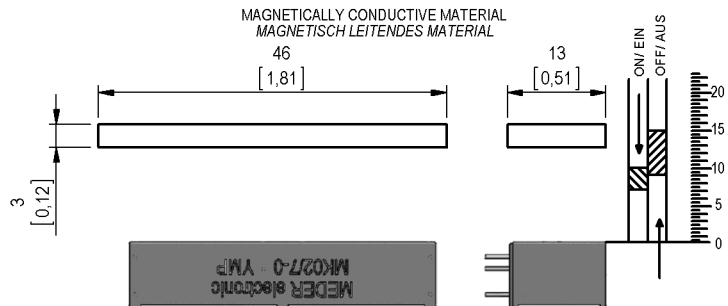



*Products for tomorrow...*

Europe: +49 / 7731 8399 0 | Email: info@meder.com  
 USA: +1 / 508 295 0771 | Email: salesusa@meder.com  
 Asia: +852 / 2955 1682 | Email: salesasia@meder.com

Item No.: **2227000000**  
 Item: **MK02/7-0**  
**MK02/5 print version, Annäherung seitlich**

Magnetic properties	Conditions	Min	Typ	Max	Unit
Pull in	at 20°C	7		10	mm
Drop out	at 20°C	8		15	mm
Test equipment		SV 045			

Special Product Data	Conditions	Min	Typ	Max	Unit
Contact - No.		87			
Contact - form		A - NO			
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
operating voltage	DC or Peak AC			200	V
operating ampere	DC or Peak AC			0,5	A
Switching current	DC or Peak AC			0,4	A
Sensor-resistance	measured with 40% overdrive Sensor deactivated			150	mOhm
Housing material		PBT glass fibre reinforced			
Case color		black			
Sealing compound		Polyurethan			

Environmental data	Conditions	Min	Typ	Max	Unit
Operating temperature		-30		80	°C
Storage temperature		-30		80	°C